

Professional all-terrain garden tractors MULCHER 92 PRO 4x4 - 4x2

Sturdy and reliable, professional all-terrain garden tractors are suitable for large areas up to 9,000 m². They are designed for clearing and tidying overgrown areas with thick vegetation and on uneven and sloping ground where pick-up is not required.

These garden tractors are equipped with various devices to facilitate the work of the operator, such as hydrostatic transmission with lever or pedal operation for control of travel direction and speed, the self-locking differential and the cutter drive electromagnetic clutch. Cruise Control is standard on all models, operated using a lever, and enables the garden tractor to maintain a constant travel speed while working.



< 9000 m²

Performance and engineering solutions

- 1** — The standard **twin-cylinder engines** guarantee reliability and high performance in terms of torque and power delivery in all working conditions, even the most demanding.



- 2** — The pedal-operated differential **lock system** and 4-wheel drive (4x4 version) can overcome any difficulty on any type of terrain.



- 3** — The **hydrostatic transmission** provides propulsion by means of a simple lever action and easily adapts the speed to any type of application and terrain, even on steep slopes (up to 22°).
 — **Electromagnetic clutch**, activated by means of the switch located on the side of the steering wheel, enables the blade to be operated independently of the tractor's ground speed, but only if the driver is seated (a microswitch located under the seat detects the driver's presence).




- 4** — **Underbody blade with** floating tips, extremely resistant to wear, slices through even the most stubborn vegetation (reeds, shrubs...) and has a cutting diameter of 92 cm.



Comfort and ease of use

- 1** — Centralised **cutting height** adjustment (6 positions from 5–12 cm) by means of control lever located to the left of the operator **(a)**.
 — **Anatomical and adjustable seat**, proximity to the steering wheel can be adjusted by means of the dedicated lever **(b)**.

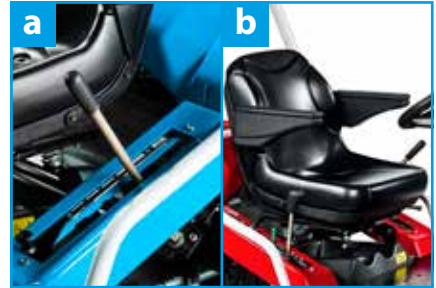

- 2** — **LCD display** shows all service info and alerts the operator whenever scheduled maintenance is required, so that the machine is always running at peak efficiency.



- 3** — **Tank cap** with level indicator tells the operator at a glance how much fuel is left in the tank.
 — The front and rear **bumpers** and the **folding roll bar** assure excellent protection and safety.



- 4** — Access to the engine compartment is greatly simplified by the **hinged bonnet (a)**, as well as by the front hatch of the **battery compartment**, which can be removed by loosening the knob **(b)**.



MODEL	MULCHER 92 PRO 4x2	MULCHER 92 PRO 4x4
DISPLACEMENT	627 cm ³ - 708 cm ³	708 cm ³ - 726 cm ³
ENGINE	B&S Vanguard V-Twin - Emak K 2400 AVD V-Twin	Emak K 2400 AVD V-Twin - Kawasaki FS 651
CUTTING WIDTH/NO. OF BLADES	92 cm/1 (with 2 floating blades)	
TRANSMISSION (REAR/FRONT)	Hydro Tuff Torq K62 M	Hydro Tuff Torq K664 - Kanzaki KXH 10N
SPEED	from 0 to 9.0 km/h in forward drive- from 0 to 6.0 km/h in reverse	
TURNING RADIUS	115 cm	76 cm
MAXIMUM CLIMBING ABILITY	22°	
FUEL TANK CAPACITY	19 L	
LIGHTS	LED + Daytime running lights	
MULCHING KIT	Optional	
TOWING HITCH	Optional	
CRUISE CONTROL	Yes (by means of lever)	
CUTTING HEIGHT	50-100 mm, 5 positions + transfer position 120 mm	
DIMENSIONS	219x103x145 cm	
WEIGHT	322 kg	349 kg



It's an **Emak S.p.A.** trademark
 42011 Bagnolo in Piano (RE) Italy
mybertolini.com

